




COLOR FILTER TECHNICAL DATA SHEET

SWATCHBOOK: PERMACOLOR
 COLOR FILTER: #6100 FLAME RED
 DESCRIPTION: PERMANENT COLOR FILTER
 MAX. TRANS.: 95%

COLORIMETRIC DATA

OBSERVER: CIE 1931 10 Degree
 SOURCE: • 'A' (tungsten)
 ○ 'D65' (daylight)

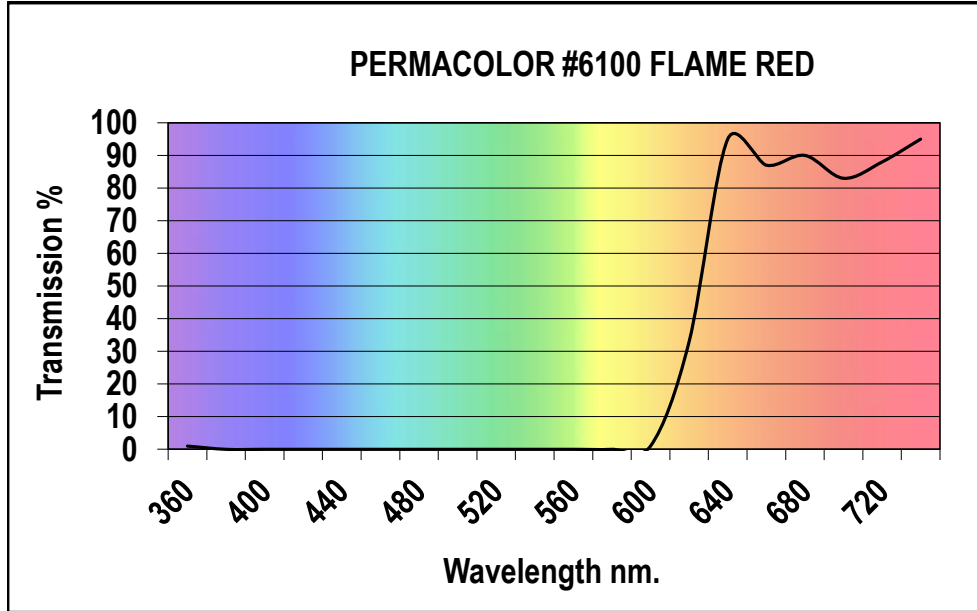


HUNTER LAB SOURCE A
L* 37.450
A* 65.010
B* 63.653

HUNTER LAB SOURCE D65
L* 27.11
A* 64.505
B* 45.782

CIE 1964 10° SOURCE A
Y 11.009
(x) 0.712
(y) 0.287

CIE 1964 10° SOURCE D65
Y 5.130
(x) 0.686
(y) 0.295

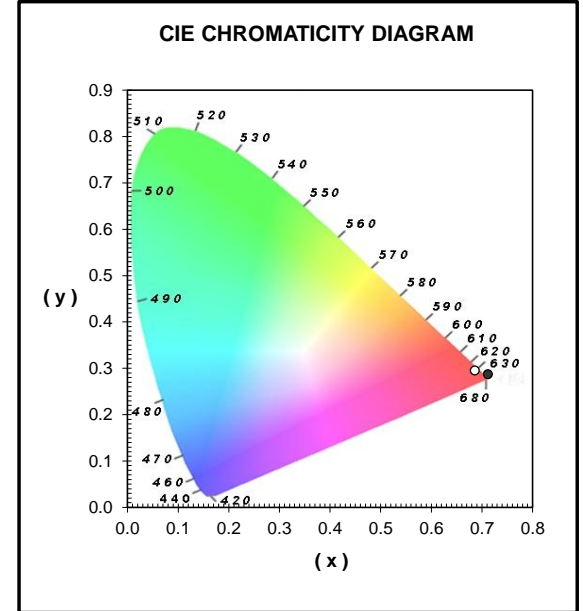

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	1	0	0	0	0	0	0	0	0	0	0	0	1	33	95	87	90	83	88	95

MATERIAL SPECIFICATIONS:

General Description: Dichroic Coated Glass Filter
 Substrate: Borosilicate
 Thickness: 1.75mm standard
 1.1mm and 3.3mm Available
 Manufactured in: U.S.A.

AVAILABLE SIZES:

CALL
 Almost Any size/Shape