

Vibrant, Versatile Lighting Solutions

RoscoLED Tape Kits are engineered LED solutions that allow set designers and architects to incorporate dramatic accent lighting into their projects. These easy-to-use kits contain four reels of high CRI, high output Static White LED tape (1800K, 2400K, 3000K or 5600K), with integrated power and dimming controls to provide vibrant, rich white light for any installation. Flexible, field-cut-able and fully configurable options offer designers and filmmakers an easy way to integrate LEDs into their next project. All RoscoLED Tape products in the kits are certified to UL and CE standards and come with a 3-year warranty.



WHAT'S IN THE KIT

- (4) Static White LED Tape, 5m reels
- (1) RoscoLED Control Box/300W/24V
- (4) RoscoLED 2-pin Static White Cable - 5M

SPECIFICATIONS

RoscoLED Tape Static White, 5m reels:

- LED Type: SMD2835
- Color Temp. Options: 1800K, 2400K, 3000K or 5600K
- 60 LEDs per meter
- Output: 1,000 lm/m
- 93 CRI / 92 TLCI
- Voltage: 24VDC
- Power Consumption: 14.4W/m or 72W per 5m reel
- Lumen Maintenance: > 47,000 hours L70 at 105C (IESNA LM-80-08 Standard)
- Operating Temp: -4° F to 140° F (-20° C to 60° C)
- IP Rating: IP43




KEY FEATURES

- High-quality white LED Tape: 93CRI / 92TLCI
- High output: 1,000 lumens per meter
- Tape reels pre-configured with 2-pin connectors for Plug-and-Play connectivity
- Power-balanced DMX addressable RoscoLED Control Box

RoscoLED Static White Control Box/300W/24V:

- Input Voltage: 90VAC ~ 264VAC via Neutrik Powercon connector
- Output Voltage: 24VDC via (4) chassis-mounted two-pin connectors
- Rated Power: 300W
- DMX: 5-Pin XLR In – RJ45 In/Out
- IP Rating: IP20

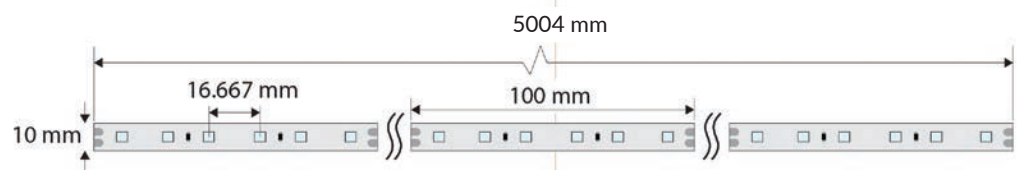

RoscoLED® Tape Static White Kits	
Item Code	Description
293220100001	RoscoLED Tape Static White Kit: 1800K
293220100002	RoscoLED Tape Static White Kit: 2400K
293220100000	RoscoLED Tape Static White Kit: 3000K
293220100015	RoscoLED Tape Static White Kit: 5600K

RoscoLED® Tape Static White Components & Accessories	
Item Code	Description
293221100003	RoscoLED Tape Static White: 1800K - 5m reel
293221100004	RoscoLED Tape Static White: 2400K - 5m reel
293221100005	RoscoLED Tape Static White: 3000K - 5m reel
293221150005	RoscoLED Tape Static White: 5600K - 5m reel
293222250000	RoscoLED Tape Static White Control Box/300W/24VDC
293222010001	RoscoLED 2-pin Static White Cable - 1M
293222010002	RoscoLED 2-pin Static White Cable - 2M
293222010003	RoscoLED 2-pin Static White Cable - 3M
293222010005	RoscoLED 2-pin Static White Cable - 5M
293222110000	RoscoLED 2-pin Static White Cable Splitter
293222010006	RoscoLED 2-pin Static White Male Connector w/Pigtail, 20 cm
293222010007	RoscoLED 2-pin Static White Female Connector w/Pigtail, 20 cm

RoscoLED® Tape Profiles	
Item Code	Description
2930R17080FR	RoscoLED Slim Rectangular Profile-1708, Frosted Lens, 2m
2931R1708CLR	RoscoLED Slim Rectangular Profile-1708, Clear Lens, 2m
2930R23080FR	RoscoLED Flush Mount Profile-2308, Frosted Lens, 2m
2930R2308CLR	RoscoLED Flush Mount Profile-2308, Clear Lens, 2m
2930R17SQ0FR	RoscoLED Rect. Profile-17SQ, Frosted Lens, 2m
2930R17SQCLR	RoscoLED Rect. Profile-17SQ, Clear Lens, 2m
293045090CLR	RoscoLED Corner Profile-1945, Clear Lens, 2m
2930450900FR	RoscoLED Corner Profile-1945, Frosted Lens, 2m
2930R20270FR	RoscoLED Square Profile-2027, Frosted Lens, 2m
2930R17230CL	RoscoLED Rect. Profile-1720 w/30° Lens, 2m
2930R171360C	RoscoLED Rect. Profile-1713 w/60° Lens, 2m
2930WD2615FR	RoscoLED Wide Profile-2615, Square Frosted Lens, 2m
2930R26230FR	RoscoLED Wide Profile-2623, Round Frosted Lens, 2m
2931R2027SPK	RoscoLED Tape Wide Profile Suspension Kit