


Rosco Custom LitePad HO 95 (95+ CRI) is a flat panel LED light source providing even, indirect lighting and is available in six color temperatures: 2700K, 3000K, 3500K, 4100K, 5300K, 6500K. At only 8 mm thick, Custom LitePad HO 95 perfectly suited to virtually any backlighting installation or to projects where only a cool, low profile light source can be used.

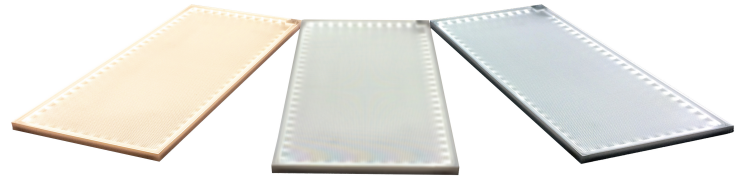

LitePad's patented system is comprised of indirect LED sources machined into a cast acrylic panel. Light amplifying channels etched into the rear surface of the plastic sheet smoothly and evenly distribute light across the entire surface of the LitePad. This durable and reliable construction can be fabricated in virtually any size or shape and is easily installed. A variety of options are available to customize light output, power management, and dimming control. Rosco project specialists are available to assist in specifying the optimal configuration of panels and accessories for your project.

Custom LitePad HO 95 offers all the same features of Rosco's standard LitePad product but offers a superior color rendering for projects where color fidelity is critical.

## SPECIFICATIONS

LED Type:	.25 Watt Surface Mounted Diode
Construction:	Optical Grade Clear Acrylic
Panel Thickness:	0.3 in (8 mm)
Weight:	2 lbs (900g)/ft <sup>2</sup>
Operational Temp.:	-22°F min to 104°F max (-30°C min to 40°C max)
Estimated Lifespan:	50,000+ hours
Operating Voltage:	12 Volt DC or 24 Volt DC
CRI:	95+
UL Listed:	File E350056
Warranty:	5 Years



## ELECTRICAL PROPERTIES

Power Consumption: 4.4W per ft.

Coordination:

Panels may be wired together in parallel, not series. Each panel must have direct connection to a power supply.

Power Supply:

Rosco has a complete range of approved power supplies to meet your project requirements.

Dimming/Control:

Rosco can provide a full suite of dimming and control accessories to complement your Custom LitePad.

Wire Placement:

The point of wire entry is customizable to accommodate your project's tiling requirements. Please consult with your project specialist.

Cord Length:

Custom LitePad comes with a 4 ft (1.2 m) two core cable. Cord length and termination is customizable based on the requirements of your project.

## PHYSICAL PROPERTIES

Single Panel Size: Max: 59" W x 118" L (1.5 m x 3 m)  
Min: 2" W x 2" L (50 mm x 50 mm)

Shaping:

Custom LitePads can be factory cut into just about any shape imaginable. Also, they can be drilled or tooled anywhere across the interior surface within 1 inch of its edge.

Heat Control:

An integral aluminum heat sink is mounted on the rear of the panel to disperse heat build-up, reducing the need for external cooling and prolonging service life.

Thin Film Reflector:

Custom LitePads include a reflective, opaque white backing to maximize optical brightness and distribution of light.

IP Rating: IP61

IP65 available on request

## ACRYLIC PROPERTIES

Flammability Classification: 94HB

Smoke Density: (D2843) 4-10%

Deflection:

Custom LitePad may bow if the panel area is too large. Broad sheets should be supported every 18 inches in any direction.

## OPTICAL PROPERTIES

LED Positioning Options:

LEDs can be positioned around any number of sides or the entire circumference.

Color Temperature Options: 2700K, 3000K, 3500K, 4100K,  
5300K, 6500K

## SPECIFICATION ORDERING INFORMATION

**LED TYPE**

HO 95

**Color Temperature**

2700K  
3000K  
3500K  
4100K  
5300K  
6500K

**Size**

Length x Width (inches/mm)  
Diameter  
CS - Custom shape  
(drawing may be required)

**LED Placement**


L1 - 1 Long Edge  
L2 - 2 Long Edges  
S1 - 1 Short Edge  
S2 - 2 Short Edges  
A4 - All 4 Sides  
DIA - Diameter  
CI - Custom Illumination

Example: HO 95 - 5300K - 3x3 - L1


Contact [customlitepad@rosco.com](mailto:customlitepad@rosco.com) for specification questions



Typical LitePad  
Front View

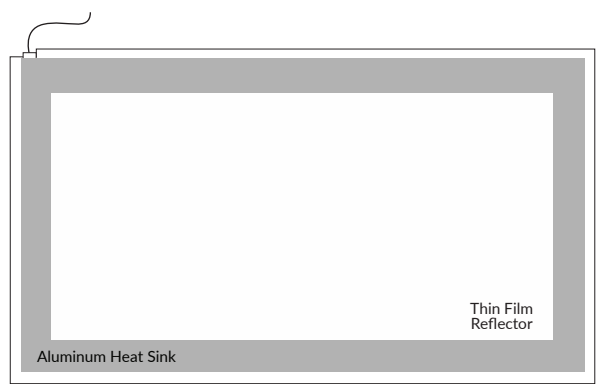

Typical LitePad  
Back View

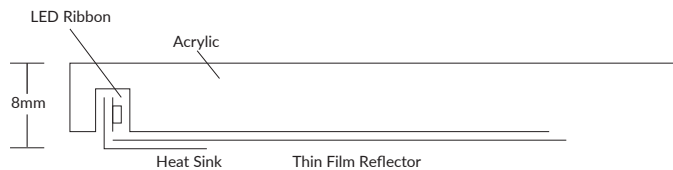

Typical LitePad  
Side View

Name: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_

Project: \_\_\_\_\_